

QuickSwitch® 6303 Single Channel LC Duplex A/B/C Switch, Multimode with Telnet & GUI

INTRODUCTION

The **QuickSwitch® 6303** Single Channel LC Duplex A/B/C Switch, Multimode with Telnet & GUI allows the user the capability of sharing a single port LC Duplex interface device, connected to the "COMMON" port, among three other devices, connected to the "A", "B" and "C" ports. The **QuickSwitch® 6303** is enclosed in a 1U, full rack size, all metal black chassis designed to fit in a standard 19" rack.

Remote access can be accomplished using an Ethernet 10/100Base-T connection via Telnet Commands or Graphical User Interface.

Users can then monitor status, lockout front panel pushbutton control, and control switch position.

FEATURES:

- The switch ports are transparent to all data.
- All fiber signals are switched via break-before-make MEMS-based mirror/prism switch technology.
- Switch maintains last set position on power loss and continues to pass data.
- Front panel pushbutton control.
- Control of the switch position from a 10/100Base-T LAN Ethernet environment. IP Addressable!
- Remote Control Telnet Command Interface that allows the user to control switch position, lockout front panel operations, obtain switch status, as well as, query firmware version, query serial number and enable/disable autosend of switch positions.
- Graphical User Interface that allows the user to control switch position, lockout front panel operations, obtain switch status, as well as, provide access to unit information such as firmware/software version and serial number.
- Remote control of the switch is password protected, where the password protection can be disabled.
- Front panel LED's display present position and power status.
- All A, B, C, and COM ports are LC Duplex, Multimode, 50/125 micron, and support a wavelength of 850 nm.
- The fiber ports are configured per TIA/EIA-568-B.3, where the TX of the COM port is routed to the RX of the A/B ports and vice versa.



SPECIFICATIONS:

PORT CONNECTORS: (4) LC Duplex connectors labeled A, B, C, and COMMON.

WAVELENGTH: 850 nm.

CONTROL: (3) Pushbuttons allow selection of switch position.
DISPLAY: (3) Red LED's display switch position and power status.

REMOTE PORT: (1) RJ45 female connector on rear panel accepts Ethernet 10/100Base-T connection and either TELNET commands or Graphical User Interface for remote operation.

POWER: UL approved 100VAC-240VAC 50Hz-60Hz wall mount power module supplies 12VDC 500 mA to the unit. Has 2-prong, US, non-polarized plug. Replacement power modules may be ordered using ESL Cat No. 516682.


DIMENSIONS: Standard rackmount, 19.0" W x 1.75" H x 8.78" D. (48.3 x 4.4 x 22.3 cm)

WEIGHT: Approximately 4.3 lbs. (2.0 kg)

WIDE RANGE POWER OPTION AVAILABLE:

(Cat No 517277) **CE, RoHS, and UL** listed table mount power module, 100VAC-240VAC, 50Hz-60Hz for use in place of standard power module that is included with the unit. Has IEC 60320 C14 inlet. **Ideal for international applications.**

QuickSwitch® 6303 LC Duplex A/B/C Switch Application

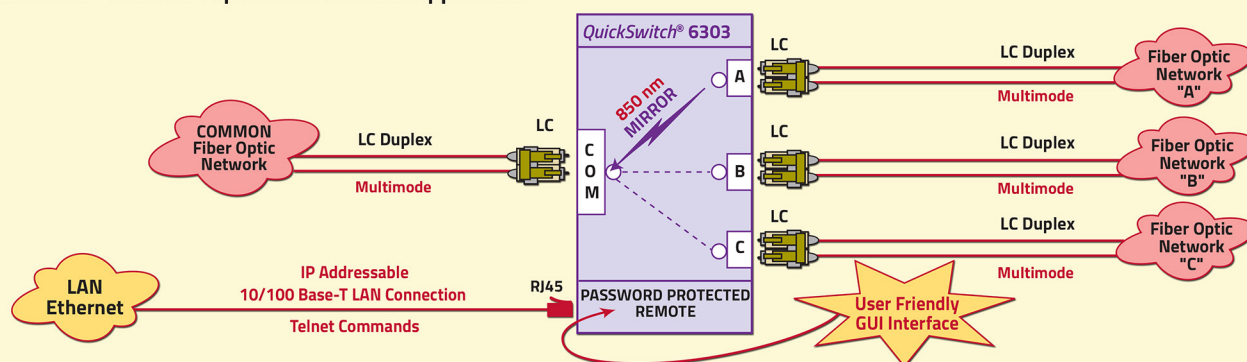

UTILIZING THE USER-FRIENDLY REMOTE GRAPHICAL USER INTERFACE SOFTWARE

To connect to the switch from a workstation or computer having access to the LAN that the Model 6303 LAN port is connected to, simply launch a standard web browser and type in the appropriate IP address. The Java Applet will be automatically uploaded from the switch upon connection. The environment requirement for the GUI is Java 1.7 and above.

10/100BASE-T LAN SETUP Network Setup

The switch is configured from the factory to use DHCP to automatically get its IP address from a DHCP server on the local area network when connected to the network and powered up. Therefore, a DHCP server is needed on the local area network for the initial configuration. After that, the switch can be configured to use a static IP address. To find the IP address of a switch that it has gotten from the DHCP server, or to reconfigure the IP Address of the switch, use the Lantronix® DeviceInstaller application.

Getting DeviceInstaller

DeviceInstaller requires Microsoft's .NET Framework version 4.0 or higher. If the .NET Framework is not already installed, it must first be installed. The .NET Framework can be downloaded from Microsoft's website, either as a web install, or as a standalone installation. The latest version of DeviceInstaller can be downloaded from Lantronix's website.


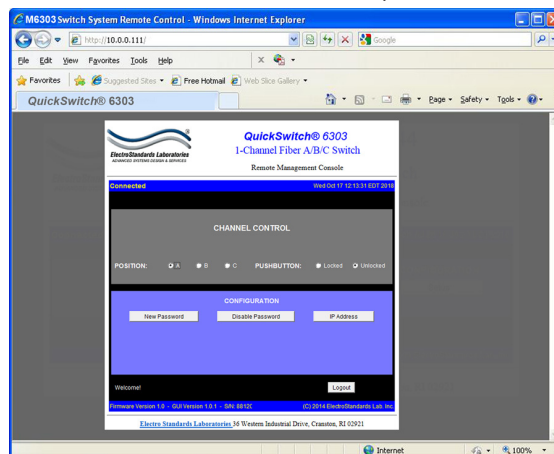


Figure 1: GUI in a Standard Web Browser

CHANGING POSITION AND LOCK STATUS

To change the switch position of the unit, click on the radio button "A", "B", or "C" as desired. Locking and unlocking the front panel pushbuttons can be done by clicking on the "Locked" or "Unlocked" radio buttons via the GUI. See Figure 2.

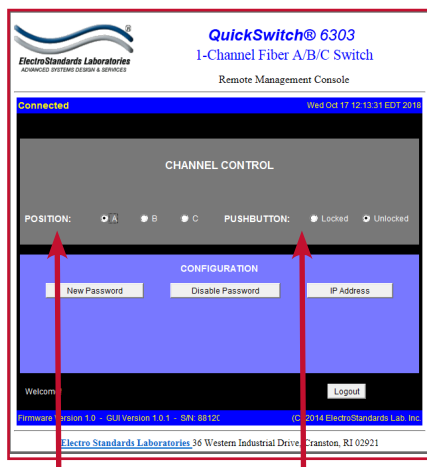

Switch position by selecting a radio button, "A", "B", or "C".

Select the radio button "Locked" or "Unlocked" to lock and unlock front panel pushbutton operations.

Figure 2: Change the position and lockout via the GUI

QUERYING THE STATUS OF THE UNIT

Once connected, the GUI will stay "Up-to-date" on the present position and status of the unit. Any changes that are made outside of the GUI, such as by pushbutton, will be reflected in the GUI. Auto-send of updates should be enabled in order to reflect the most accurate status updates such as pushbuttons. These changes will cause the radio buttons of the GUI to automatically change to show the new status. The GUI will report the source of the most recent change in the bottom left of the panel. See Figure 3.

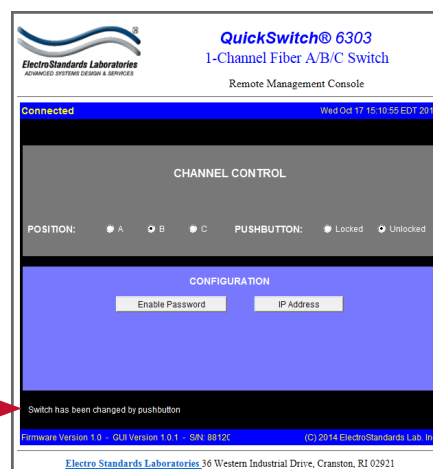


Figure 3: Switch position change made via the front panel push-button. The change in status is shown as an alert in the Graphical User Interface.