



Electro Standards Laboratories
ADVANCED SYSTEMS DESIGN & SERVICES



SPECIFICATIONS
MODEL 8652
Cat. No. 304110

LineSelect® Model 8652 DB25 RS232 A/B/C/D/E/F Switch, Desktop, Manual Operation


- Applicable to switching ANY RJ45 Interface Device.
- Field Proven, Highly Reliable!
- Switch between devices without having to disconnect cables.

INTRODUCTION

The LineSelect® Model 8652 DB25 RS232 A/B/C/D/E/F Switch allows the user the capability of sharing a DB25 interface device connected to the "COMMON" port among six other devices connected to the "A", "B", "C", "D", "E", and "F" ports. The LineSelect® Model 8652 is enclosed in an all metal black chassis designed to provide EMI/RFI shielding and be used as a desktop unit.

FEATURES:

- Allows quick connection to any one of six devices from one COMMON device.
- High quality sealed switch with self-wiping low impedance contacts.
- Eliminates the need to plug and unplug cables.
- No external power required.
- Transparent to data speed and format.
- Manual operation via front-panel rotary switch.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Custom length DB25 cables available for your switch installation.
- All 25 pins of the DB25 interface are switched.
- Improves computer network efficiency by allowing sharing of peripherals.
- **Lifetime guarantee against manufacturing defects.**

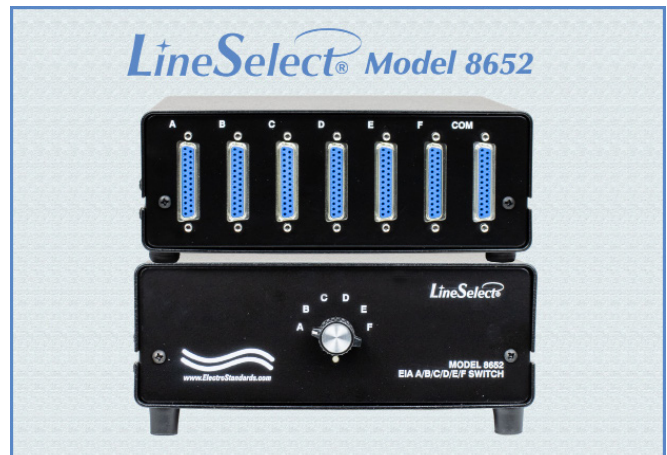

SPECIFICATIONS:

PORT CONNECTORS: (7) DB25 female connectors labeled A, B, C, D, E, F and COM.

FRONT PANEL CONTROL: (1) Rotary switch on front panel selects A, B, C, D, E, or F.

POWER: No power required. Manually operated.

DESKTOP ENCLOSURE: 8.1"W x 3.47"H x 7.74"D. (20.6 x 8.9 x 19.7 cm)

WEIGHT: 2 lbs. (0.9 kg)

Ask about our popular Model 700 RS232 Breakout Box Tri-State LED's monitor the data interface and "TELL ALL" for fault isolation.



LineSelect® Model 8652 Application

