

SPECIFICATIONS MODEL 9250 (Cat. No. 309250)

LineSelect Model 9250 Dual-Channel Switch, RS530 DB25 A/B/C and DB25 A/B, Manual, Rackmount

• Applicable to Switching ANY DB25 interface devices.

INTRODUCTION

The *LineSelect*® Model 9250 Switch system is comprised of two independent sharing switches efficiently packaged in a 19-inch wide 2U high (3.5") rackmount unit. The switch functions are described and illustrated below.

FEATURES:

 Independently switch each of the two channels manually via two knobs located on the front panel, one knob per channel.

Channel 1: DB25 A/B/C Switch with (4) DB25 female connectors for ports "A", "B", "C" and "Common". **Channel 2:** DB25 A/B Switch with (3) DB25 female connectors for ports "A", "B" and "Common".

- All 25 pins of the RS530 interface are switched via break-before-make rotary switch.
- High reliability, precious metal, sealed switches.
- Transparent to data speed and format.
- Eliminates the need to plug and unplug cables.
- All ports located on rear panel.
- Manual operation. No power required.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Custom length DB25 cables are available for your switch installation.
- Lifetime warranty against manufacturing defects.



SPECIFICATIONS:

CHANNEL-1 PORT CONNECTORS: (4) DB25 female connectors labeled A, B, C, and COMMON. **CHANNEL-2 PORT CONNECTORS:** (3) DB25 female connectors

labeled A, B, and COMMON.


FRONT PANEL CONTROLS: (2) Manual rotary switches allow local switching. DIMENSIONS: Rackmount 19.0" W x 3.5" H x 8.0" D.

(48.3 x 8.9 x 20.3 cm) **WEIGHT:** Approximately 6.0 lbs. (2.72 kg)

Ask about our popular

Model 900 EIA/TIA RS-530 Interface Analyzer Red and Green light emitting diodes indicate status of key signals at the EIA/TIA data interface. Easy to use for fault isolation.



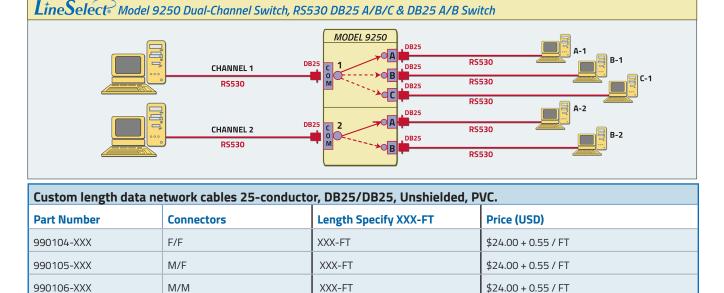

36 Western Industrial Drive, Cranston, RI 02921www.ElectroStandards.comTel: 401-943-1164Fax:401-946-5790E-mail:eslab@ElectroStandards.com