



# SPECIFICATIONS MODEL 9455SR (Cat. No. 309455SR)

# LineSelect Model 9455SR Dual Channel RJ45 Cat5e A/B Switch, Manual, Simultaneous Switching, Rackmount

- All Ports Are Shielded RJ45 Connectors.
- Certified for Cat 5e Compliance.
- RoHS Compliance.

## **INTRODUCTION:**

The *LineSelect*® Model 9455SR is a dual-channel RJ45 A/B Switch. Both channels switch to A or B simultaneously. Each of the two channels reroutes data from its COMMON port to its A or B port, depending on switch position. The unit supports all 8 pins of the RJ45 Cat5e interface. The *LineSelect*® Model 9455SR is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding.

#### **FEATURES:**

- LineSelect<sup>®</sup> Model 9455SR allows quick connection to any one of two devices from one COMMON device for each channel.
- Rated for 10/100/1000 Base-T networks (Up to Cat 5e).
- All ports are shielded RJ45 connectors.
- All 8 pins of the RJ45 interface are switched via breakbefore-make rotary switch.
- The switch ports are transparent to all data.
- Simultaneously switches both channels via front-panel rotary switch.
- High quality sealed switch with self-wiping precious metal contacts.
- Eliminates the need to plug and unplug cables.
- No external power is required.
- Rackmount configuration.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Lifetime warranty against manufacturing defects.
- Custom length Cat5e cables available for your switch application.




## **SPECIFICATIONS:**

**PORT CONNECTORS:** (3) Shielded RJ45 female connectors labeled A, B, and COMMON, for Channel 1, and (3) RJ45 shielded connectors labeled A, B, and COMMON, for Channel 2.

**FRONT PANEL CONTROLS:** (1) Rotary switch on front panel selects A or B for both channels, simultaneously. **POWER:** No power required. Manually operated. **DIMENSIONS:** Rackmount 19.0" W x 1.75" H x 8.88" D. (48.3 x 4.4 x 22.6 cm) **WEIGHT:** 4.1 lbs. (1.9 kg)

#### Order Custom Length Cat5e Cables for Optimum Performance!

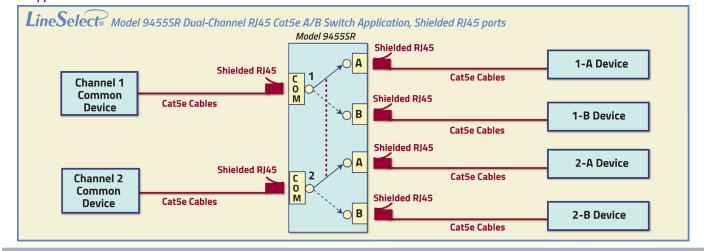

 36 Western Industrial Drive, Cranston, RI 02921

 Tel: 401-943-1164
 Fax:401-946-5790

www.ElectroStandards.com E-mail:eslab@ElectroStandards.com