



SPECIFICATIONS MODEL 9470

(Cat. No. 309470

LineSelect Model 9470 DB25 A/B/C/D Switch, Manual, Rackmount

- Provides reliable network backup for mission critical systems.
- Applicable to switching ANY DB25 interface devices.

INTRODUCTION

The *LineSelect*® Model 9470 DB25 A/B/C/D Switch allows the user to access four DB25 devices connected to its A, B,C, and D ports with one DB25 device connected to its COMMON port. The unit is manually operated, requiring no power. Port selection is quick and easy via a front panel rotary switch. The *LineSelect*® Model 9470 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

FEATURES:

- Allows quick connection to any one of four DB25 devices or networks from one COMMON device or network.
- Manual operation via front-panel rotary switch.
- High quality sealed switch with self-wiping low impedance contacts.
- Transparent to data speed and format.
- All 25 pins of the DB25 interface are switched via break-before-make rotary switch.
- Eliminates the need to plug and unplug cables.
- No external power required.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- For RoHS Compliant version, See Model 9470R, Cat. No. 309470R.
- Custom length DB25 cables available for your switch installation.
- . Lifetime warranty against manufacturing defects.



SPECIFICATIONS:

PORT CONNECTORS: (5) DB25 female connectors labeled A, B, C, D and COMMON.

FRONT PANEL CONTROL: (1) Rotary switch on front panel selects A, B, C, D.

LIFE: 10,000 cycles at the rate of 20-25 cycles/minute and no load.

OPERATING & STORAGE TEMP: -10° C to +60° C. **POWER:** No power required. Manually operated. **DIMENSIONS:** Rackmount 19.0" W x 1.75" H x 8.75" D. (48.3 x 4.5 x 22.4 cm)

WEIGHT: Approximately 4.4 lbs. (2.0 kg)


Ask about our popular Model 700

RS232 Breakout Box

Tri-State LED's monitor the data interface and "TELL ALL" for fault isolation.



Custom length data network cables 25-conductor, DB25/DB25, Unshielded, PVC.			
Part Number	Connectors	Length Specify ###-FT	Price (USD)
990104-###	F/F	###-FT	Call for Price!
990105-###	M/F	###-FT	Call for Price!
990106-###	M/M	###-FT	Call for Price!

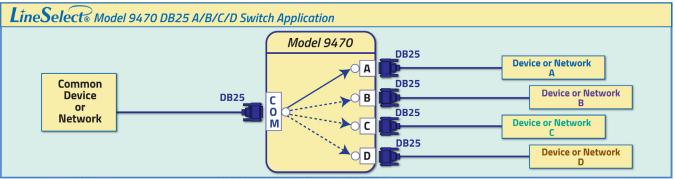

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com