

SPECIFICATIONS MODEL 9924

(Cat. No. 305924)

LineSelect Model 9924 Five-Channel DB9 A/B Switch, Manual, Simultaneous Switching, Rackmount

- Switch Five Channels to an Alternate Path, Simultaneously!
- Popular in TV station Switching Applications.

INTRODUCTION

With each of its five channels, the <code>LineSelect</code>® Model 9924 DB9 A/B Switch allows the user to access two DB9 interface devices connected to its A and B ports with one DB9 interface device connected to its COMMON port. The five channels are switched simultaneously via a knob located on the front panel. See the application diagram below. The <code>LineSelect</code>® Model 9924 is enclosed in a 1U, full rack size, all metal black chassis designed to provide EMI/RFI shielding and fit in a standard 19" rack.

FEATURES:

- Each of five channels allows quick connection to any one of two devices from one COMMON device.
- Simultaneously switches all five channels via front-panel rotary switch.
- High quality sealed switch with self-wiping low impedance contacts.
- All 9 pins of the DB9 interface are switched via break-beforemake rotary switch.
- Ideal for RS232, RS422, RS485 or ANY application that has a DB9 connector interface.
- The switch ports are transparent to all data.
- Improves computer network efficiency by allowing sharing of peripherals.
- Eliminates the need to plug and unplug cables.
- Attractive all metal black box packaging provides EMI/RFI shielding.
- Lifetime warranty against manufacturing defects.



SPECIFICATIONS:

PORT CONNECTORS: (3) DB9 female connectors labeled A, B, and COMMON, for each of the 5 channels.

FRONT PANEL CONTROL: (1) Rotary switch on front panel selects A or B position for all 5 channels.

POWER: No power required. Manually operated.


DIMENSIONS: Rackmount 19.0" W x 1.75" H x 8.66" D.


(48.3 x 4.4 x 22.0 cm)

WEIGHT: Approximately 4.4 lbs (2.0 kg).

Do you require a variation from this specification?

Call to discuss!

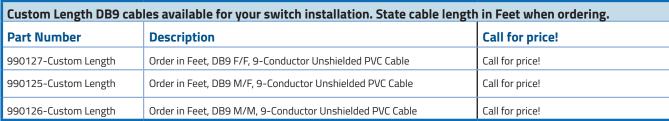

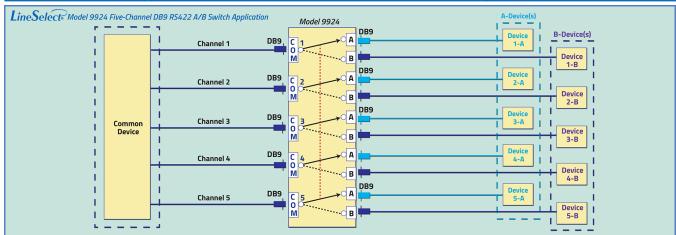

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax: 401-946-5790 www.ElectroStandards.com E-mail: eslab@ElectroStandards.com