

## LineSelect® Model 9087 RJ45 A/B/C Switch, Manual, DIN Rail Mounted, Cat5e Compliant

- Convenient DIN rail mounting, ideal for use in process control systems.

### INTRODUCTION


The Model 9087 RJ45 A/B/C switch allows the user to access three RJ45 devices connected to its A, B, and C ports with one RJ45 device connected to its COMMON port. The unit is a manually operated switch, requiring no power. Port selection is quick and easy via a front panel rotary switch. The Model 9087 switch is easily integrated as a system component by utilizing its rear panel DIN rail mounting bracket.

### FEATURES:

- Allows (1) COMMON RJ45 port to be shared among any one of (3) RJ45 ports A, B, or C.
- Manual operation via front panel mounted rotary switch.
- Switches all 8 leads of the RJ45 interface via break-before-make rotary switch.
- **Certified for Category 5e Compliance!**
- Manually operated. No power required!
- DIN rail bracket on rear panel.
- Grounding screw is mounted on the front panel.
- Custom length Cat5e RJ45 cables available.

### SPECIFICATIONS:

- **PORT CONNECTORS:** (4) RJ45 female connectors labeled A, B, C, and COMMON.
- **FRONT PANEL CONTROL:** (1) Rotary switch allows local switching.
- **POWER:** No power required. Manually operated.
- **ENCLOSURE:** Black box packaging provides EMI/RFI shielding.
- **DIMENSIONS:** DIN Rail Mount Package: 1.75" W x 4.28"H x 6.90"D (4.5 x 10.9 x 17.6 cm).
- **WEIGHT:** Approximately 1.2 lbs (0.6 kg).

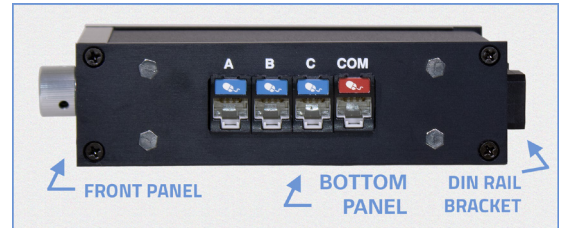

### Cat5e patchcords - ideal for 10BASE-T, 100BASE-T, 1000BASE-T Ethernet and Gigabit Ethernet

Color	3 ft. (Call for Price)	5 ft. (Call for Price)	10 ft. (Call for Price)	25 ft. (Call for Price)
Black	990328-003	990328-005	990328-010	990328-025
Blue	990329-003	990329-005	990329-010	990329-025
Green	990330-003	990330-005	990330-010	990330-025
Purple	990332-003	990332-005	990332-010	990332-025
Red	990333-003	990333-005	990333-010	990333-025
Grey	990334-003	990334-005	990334-010	990334-025
White	990335-003	990335-005	990335-010	990335-025
Yellow	990336-003	990336-005	990336-010	990336-025

### LineSelect® Model 9087 RJ45 A/B/C Switch Application Diagram

