

SPECIFICATIONS MODEL 8275

(Cat. No. 308275)

Model 8275 RJ45 A/B Switch, Manual, Cat5e Compliant, Shielded RJ45 Ports, 6-32

Mounting Screw Holes INTRODUCTION

The Model 8275 RJ45 A/B Switch allows the user to access two RJ45 devices connected to its A and B ports with one RJ45 device connected to its COMMON port. The unit is a manually operated switch, requiring no power. Port selection is quick and easy via a front panel rotary selector switch. **FEATURES:**

- Designed to accommodate secure fastening to a flat surface, the unit has four mounting holes (6-32 threaded) on the chassis bottom.
- Manual control of switch position via a knob located on front panel.
- All 8 pins of the RJ45 interface are switched via break-before-make rotary switch.
- Rated for 10/100/1000 networks (Up to Cat5e).
- All (3) shielded RJ45 female ports A, B, and COMMON are located on rear panel.
- All port shields are grounded to the chassis.
- Attractive anodized black box packaging provides EMI/RFI shielding.
- Maximum mounting screw length from bottom of chassis is 0.35".
- Lifetime warranty against manufacturing defects.
- Custom length Cat5e RJ45 cables available. See table below.



SPECIFICATIONS:


PORT CONNECTORS: (3) Shielded RJ45 female connectors labeled A, B, and COMMON.

FRONT PANEL CONTROL: (1) Rotary selector switch allows local switching.

POWER: No power required. Manually operated. **DIMENSIONS:** Desktop, 5.25" W x 2.0" H x 7.25" D. (13.4 X 5.1 X 18.5 cm)

WEIGHT: Approximately 1.5 lbs (0.7 kg)

Cat5e patchcords - ideal for 10BASE-T, 100BASE-T, 1000BASE-T Ethernet and Gigabit Ethernet Color 3 ft. price 5 ft. price 10 ft. 25 ft. price price Black 990328-003 By call 990328-005 By call 990328-010 By call 990328-025 By call 990329-010 Blue 990329-003 990329-005 990329-025 By call By call By call By call 990330-003 Green By call 990330-005 By call 990330-010 By call 990330-025 By call Purple 990332-003 By call 990332-005 By call 990332-010 By call 990332-025 By call 990333-003 Red By call 990333-005 By call 990333-010 By call 990333-025 By call Grev 990334-003 By call 990334-005 By call 990334-010 By call 990334-025 By call White 990335-003 By call 990335-005 990335-025 By call 990335-010 By call By call Yellow 990336-003 By call 990336-005 Bv call 990336-010 By call 990336-025 By call

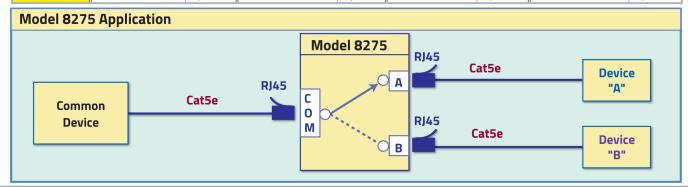

36 Western Industrial Drive, Cranston, RI 02921 Tel: 401-943-1164 Fax:401-946-5790 www.ElectroStandards.com E-mail:eslab@ElectroStandards.com